

15-CD51HD

Color / Mono. Internal PTZ Dome with ICR, 100X Power Zoom




Feature


- Pan & Tilt Speed Up to 360° per second
- Support Auto-Flip, tilt degree is up to 180°
- 360 Degree Rotation, 127 Preset Positions
- 8 Groups for present program
- 8 set of swing action
- Support 4 Pattern
- 4 Privacy Zones
- 1/4" Interline Transfer CCD
- F1.8, f=3.8~38mm, auto IRIS Lens
- 10X Optical zoom, 10x digital zoom, total 100X zoom
- Support Day / Night function
- IR Cut Filter Removable
- AGC, ALC, AES, BLC, AWB, detection zones

DRAWINGS, DIAGRAMS OR ILLUSTRATIVE IMAGES FOR YOUR GUIDANCE

□ Ceiling Bracket

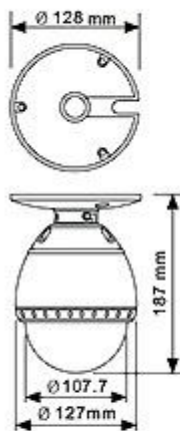


□ Pendant Bracket Bracket: 15-CD03B

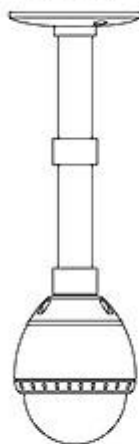


□ Wall Mount Bracket

Bracket:
15-CD08BA

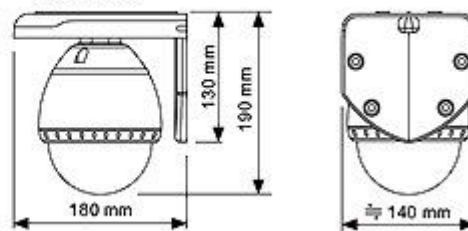

Bracket:
15-CD03BS

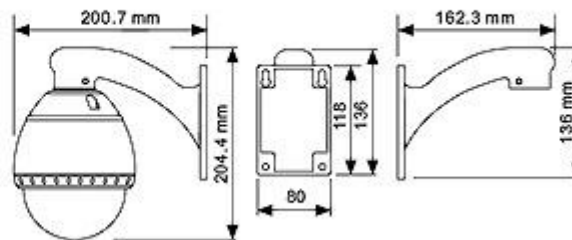

TECHNICAL DATA FOR GUIDANCE PURPOSES ONLY PLEASE VERIFY WITH OUR SALES OFFICE

Pick Up Device	1/4"Interline Transfer CCD
Effective Pixels	N: 768(H)× 494(V)380K ; P: 752(H)× 582(V)440K
S/N	50 dB (AGC Off)
Horizontal Resolution	500 TV Line(Color), 570 TV Line(B/W)
Lens	F1.8, f=3.8~38mm
Zoom	10x Optical zoom, 10x Digital Zoom, total 100x zoom
White Balance	ATW or AWB R / B Gain Level adjustable
IRIS	Auto / Manual
AGC	Normal / High / Off
BLC Function	Low / Middle / High / Off
ICR Function	YES
Illumination	0.7 Lux(Color) / 0.02 Lux (B/W), 50 IRE
Shutter Speed	1/60~1/120000 sec(N); 1/50 ~ 1/120000 sec(P)
Flicker less	Low / Middle / High / Off
Focus	Auto / Manual / SemiAuto
Pan	Pan : 360 (Endless)
Tilt	Tilt : 180 (Auto-Flip), 95 (Normal)
Preset	127 Preset ; Auto Speed:360 /sec , manual: 0.05~360 sec
Pattern	4 Pattern, 1200 commands(about 5 min)
Swing	8 Swing / Speed: 1~180 /sec
Group	8 Group (20 action entities per Group)
Other Function	Auto flip, AutoParking, Power up action etc
Fan & Heater	X
Operation Temperature	0 °C ~ 40 °C
Power Source	DC 12V