

## 15-CD53W-S23

Color / Monochrome External Middle Speed Dome 230X Power Zoom



### Feature

#### CAMERA


- 1/4 inch, Interline Transfer CCD
- 520 TV Lines(Min.): Color / 570 TV Lines(Min.):B/W
- 0.6Lux: Color ; 0.1Lux:B/W
- Auto iris & ICR
- Support Back light compensation
- $f = 3.84$  to  $88.4$ mm (F=1.6 to 3.0)
- 230X zoom (23X optical zoom, 10X digital zoom)
- Built-in heater & blower
- Pan range 0~360°, speed 0.5~260°/S
- Tilt range 0~90°, speed 0.5~120°/S
- 128 Preset positions, 1 Auto cruising track
- RS-485 multi protocols communication
- AC24V power supply

#### HOUSING

- External weather proof
- Built-in 24V heater and blower
- Die-cast metal construction
- Wall mount bracket included
- Sunshield available as option
- Size:  $\varnothing 200$  x 336 mm

\* OPTION: Bracket, Module

### DRAWINGS, DIAGRAMS OR ILLUSTRATIVE IMAGES FOR YOUR GUIDANCE

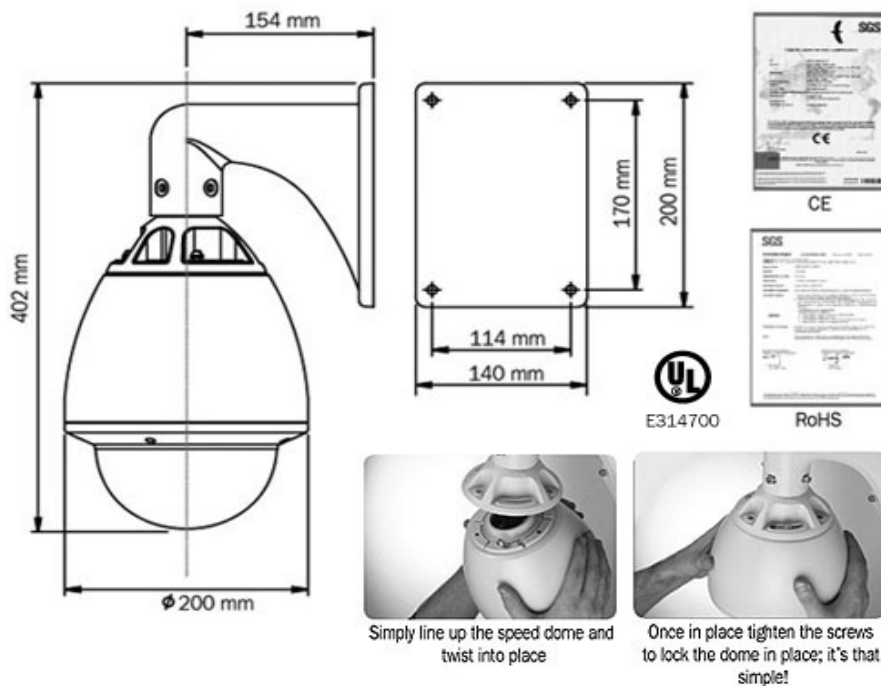

**TECHNICAL DATA FOR GUIDANCE PURPOSES ONLY PLEASE VERIFY WITH OUR SALES OFFICE**

Signal System	NTSC/PAL
Image Sensor	1/4 inch, Interline Transfer CCD
Picture Elements	NTSC: 768(H) x 494(V) / PAL: 752(H) x 582(V)
Resolution	520 TV Lines(Min.):Color / 570 TV Lines(Min.):B/W
Video Signal Output	1Vp-p Composite Video(75Ω)
SYNC System	Internal / Line-Lock
Lens	f=3.84 to 88.4mm (F=1.6 to 3.0)
Zoom	23x optical, 10x digital, total 230x
S/N Ratio	50dB (AGC Off, Weight ON)
Minimum Illumination	0.6Lux/F1.6(50 IRE):Color ; 0.1Lux/F1.6(50 IRE):B/W
Shutter	1/60sec~1/120,000sec(NTSC) ; 1/50sec~1/120,000sec(NTSC)
White Balance	ATW [Indoor(3,000K~6,500K), Outdoor(1,800K~10,500K)] / AWC / Manual
Gain	Low / Middle / High / Off Selectable
Back light Compensation	Low / Middle / High / Off Selectable
Protocol	Pelco D/P, COP-2
Pan	0~360°, Speed 0.5~260°/sec
Tilt	0~90°, Speed 0.5~120°/sec
Presets Positions	128 Position ( Zoom, Focus )
Auto Cruising	1 Auto Cruising Tracks(Max)
Auto Scan	YES
Power Source	AC24V/2A
Operating Temperature	-30°C ~ +50°C
Humidity	10% ~ 90%