


15-CD55W-1010 Colour / Monochrome External High Speed Dome 432X Power Zoom



Feature

- 1/4" CCD with SONY original module
- High sensitivity of 0.01 lux (F1.6, 1/4s NTSC ICR ON)
- High horizontal resolution 530TV lines
- 432X zoom ratio 36X optical, 12X digital
- Electronic Image Stabilizer
- Wide Dynamic Range (WDR) support
- 24 Privacy mask zone
- 3-D coordinate
- 4 alarm input and 2 alarm output
- 5 auto cruising track, and 2 min patrol
- Pan range 0~360°, speed 300°/s
- Tilt range 0~96°, speed 150°/s
- RS-485 multi-protocols communication
- Anti-drop wire for bubble cover
- Built-in heater and blower
- External weather tamper resistant housing, IP66
- Wall mount bracket included
- AC24V input
- Size: ø200 x 360 mm

DRAWINGS, DIAGRAMS OR ILLUSTRATIVE IMAGES FOR YOUR GUIDANCE

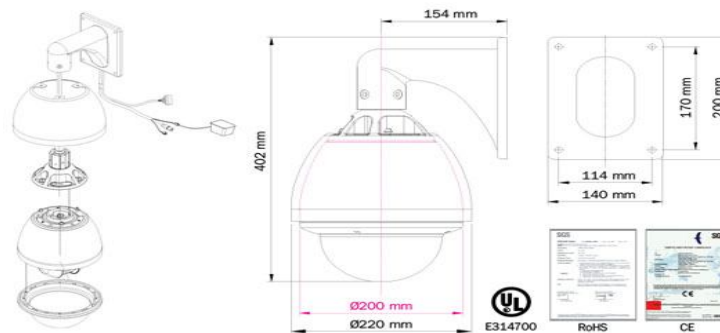

SPECIFICATION

15-CD55W-1010

Zoom Camera Module	FCB-EX1010
Signal System	NTSC / PAL
Image Sensor	1/4" SONY EX-View HAD CCD
Picture Elements	NTSC: 768(H) x 494(V) / PAL: 752(H) x 582(V)
Resolution	530TV Lines
Video Signal Output	1 Vp-p Composite Video (75 Ω)
SYNC System	Internal / External (V-Lock)
Lens	3.4mm ~ 122.4mm, F1.6~F4.5
Zoom	432X, 36x Optical, 12x Digital
S/N Ratio	50dB
Minimum Illumination	0.1 lux (1/4 NTSC) / 0.01 lux (1/4s NTSC ICR ON)
Shutter	1/4~1/10000s (NTSC), 20 Step
White Balance	ATW / Indoor / Outdoor / Manual / AWB / One Push WB
Gain	Auto / Manual
WDR	ON/OFF
Protocol	Pelco D/P, Total 19 Protocols Selectable
Pan	Speed 300°/sec
Tilt	Speed 150°/sec
Auto Cruising	5 Auto Cruising Tracks(Max), and 2 min patrol
Power Source	AV24V input, Internal / External sync
Operating Temperature	-30° C~+50° C
Storage Temperature	-20° C~+60° C